

Dual Band IR Receiver Keystone Snap-In Bulkhead Connectors

PARTS SUPPLIED:

Dual Band IR Receiver Keystone (1)

SPECIFICATIONS

Receive frequency range.....34 KHz to 60 KHz

Transmit frequencies.....38 KHz & 56 KHz

Range.....40ft. @ 38 KHz

.....25ft. @ 56 KHz


Power.....12VDC, 30mA max.

Dimensions:39.2L x 19.3W x 24.3H mm

TYPICAL SPECIFICATION

The Dual Band IR Receiver Keystone connectivity shall be individual snap-in style female-to-female bulkhead adapters, and shall fit all other installed telecommunications wallplates.

Check clearance behind proposed location of bulkhead module to ensure space for proper bend-radius of cabling media.

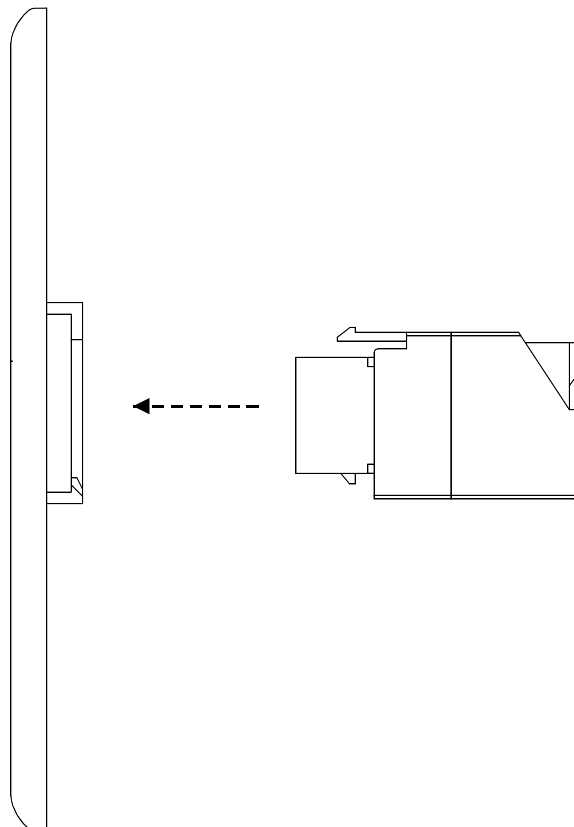

Setup Diagram

