


4-Input 4K Presentation Switcher with USB C 60W PD and Matrix Outputs, USB 3.0, MST, Multiview & Wireless Casting

SW-640L-TX-W

WyreStorm
Specification Sheet

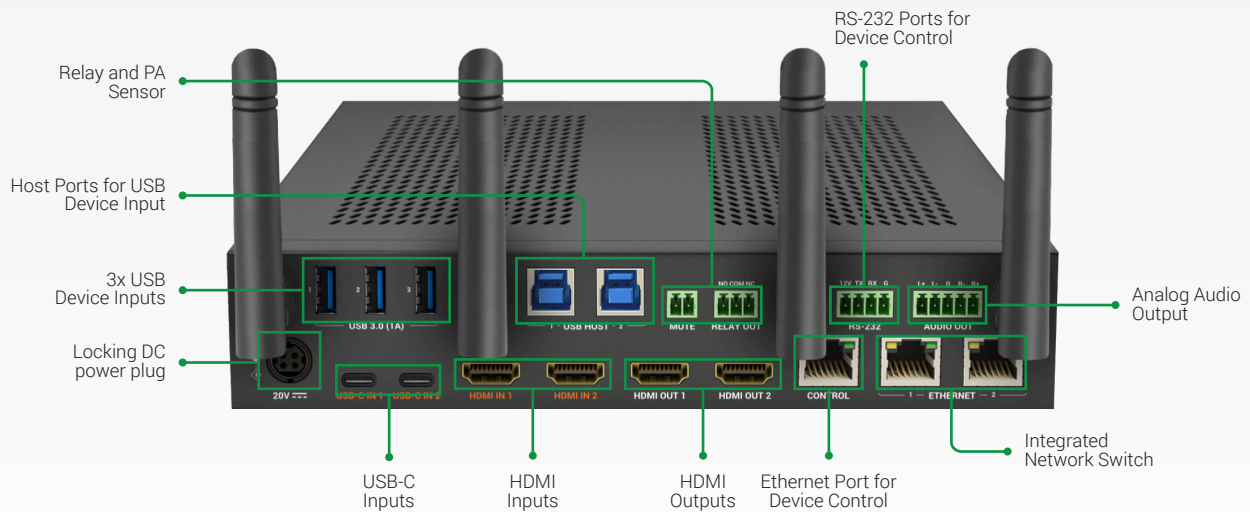

4K UHD | HDBT™ | HDMI® | HDCP 2.2

WyreStorm - Powerful. Reliable. Simple.

Introduction

The SW-640L-TX-W is an advanced presentation switcher, tailored to meet the dynamic requirements of modern meeting spaces and conference rooms. This upgraded model boasts significant enhancements. Key improvements include two USB-C inputs with 60W PD and MST support for receiving dual video signals. The switcher now features an upgraded USB 3.0 switcher, further enriched by the support for a wireless host through the APO-DG2. This addition allows for more flexible and convenient connections.

Key Features

- Automatic or manual switching of 4 connected sources (2 HDMI & 2 USB-C) with assignable USB host connection
- 60W PD on the USB C Ports
- Supports input resolutions up to 4K30 4:4:4 via USB-C or HDMI
- Wireless screensharing via Apple Airplay or Miracast
- Dual output via HDMI
- Multiview processing up to 4 simultaneous sources
- Analog audio output allows extraction of Audio.
- Compatible with all major conference software including Zoom, Microsoft Teams, Cisco WebEx and more
- Built-in USB 3.0 hub for connection of peripheral devices such as speakerphones or cameras
- Seamless switching in both single view and Multiview modes
- USB-C input supports alt-mode for both A/V (MST Supported), Ethernet, and Data communication over a single cable
- API uses Telnet over TLS for secure and encrypted communication
- Integrated webserver for control and configuration via HTTPS
- Easily mountable under a table or desk with included mounting brackets
- Built-in wireless access point for secure and isolated communication to screensharing devices
- Wireless access point supports custom SSID, password and screensharing access PIN
- Integrated 'Guide Screen' used to provide end-users with simple instructions to get connected
- Custom 'Guide Screen' can be uploaded to include company information, logos, or specific connection information
- Relay and PA Sensor

In the Box

- 1x DC 20V 9A Power Supply (UK/US/EU/AU)
- 2x Mounting Ears
- 1x 2-pin Phoenix connector (for PA SENSOR)
- 1x 3-pin Phoenix connector (for RELAY)
- 1x 4-pin Phoenix connector (for RS-232)
- 1x 5-pin Phoenix connector (for AUDIO OUT)
- 4x Wi-Fi Antennas