



Large-Medium TV Articulated Arm

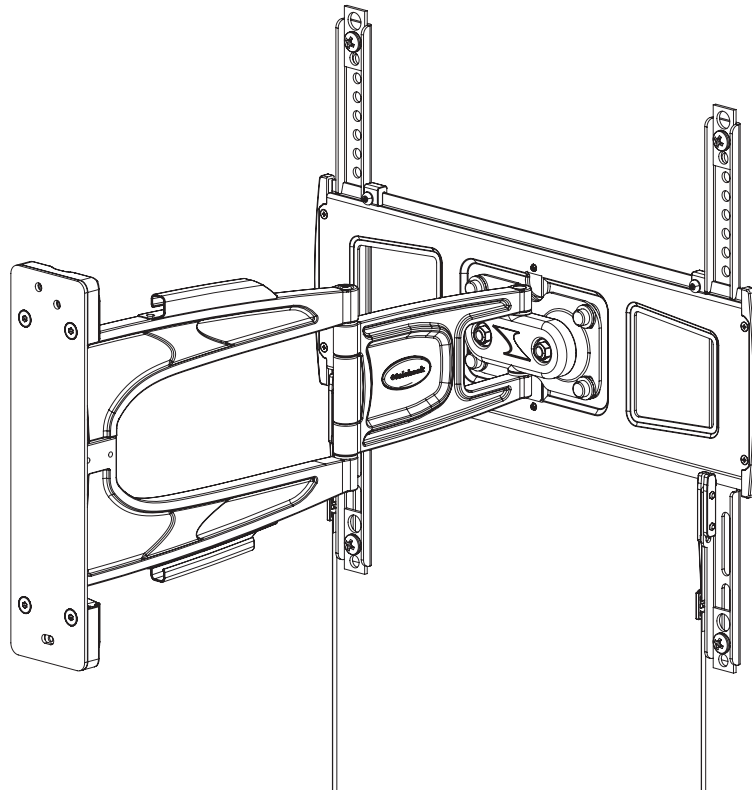

COMPONENT CHECKLIST

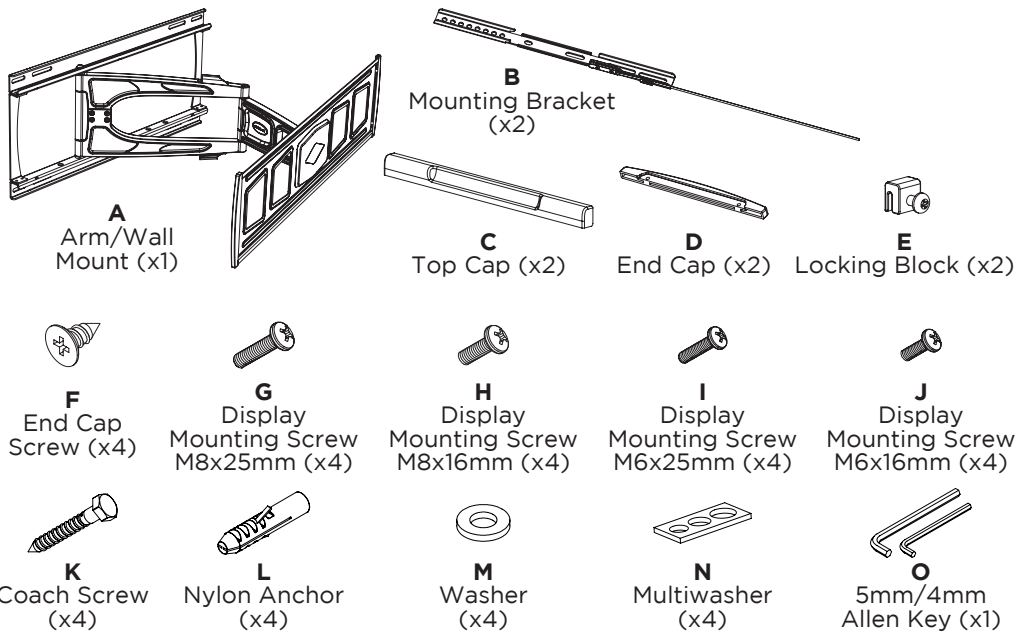

REQUIRED TOOLS

- Power drill
- 5mm (0.2") drill bit
- 10mm (0.39") masonry drill bit
- Phillips head screw driver
- 13mm (0.5") socket wrench or shifter


WEIGHT RANGE

0 - 35kg
(0 - 77lb)

IMPORTANT INFORMATION


- ! Please ensure this product is installed as per these installation instructions.
- ! This product supports a maximum load of 35kg (77lbs).
- ! This product supports VESA mounting hole configurations 200mm wide x 100mm high to 700mm wide x 500mm high.
- ! The manufacturer accepts no responsibility for incorrect installation.

1. Changing position of Arm on Wall Mount

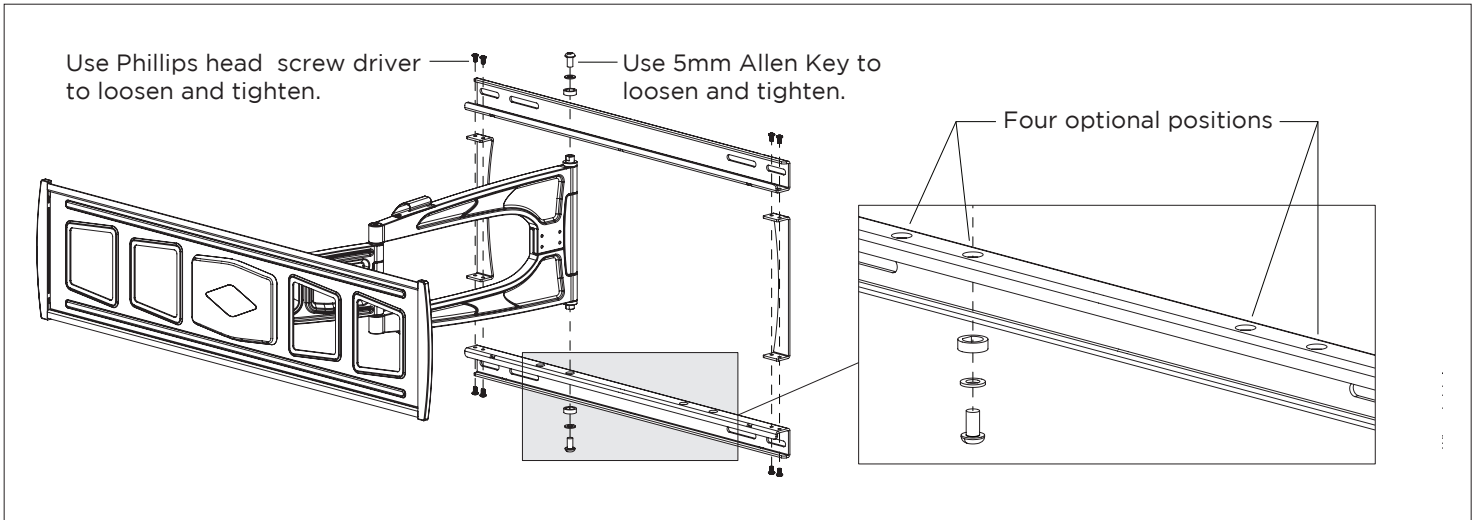


2. Install Arm/Wall Mount to the Wall

2.1 Masonry Wall

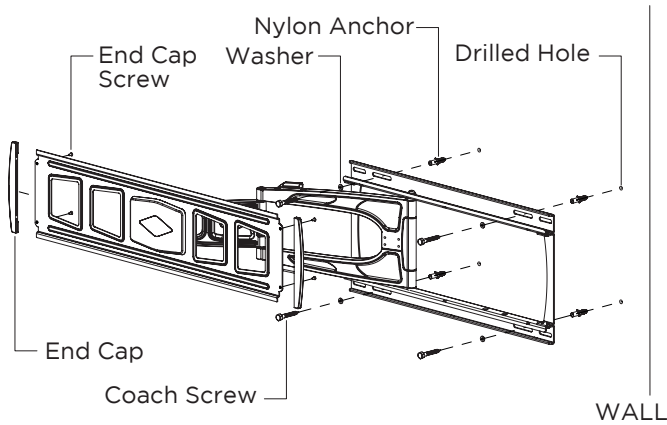

Drill four 10mm (0.39") diameter holes, 58mm (2.3") deep. Secure the mounting plate to the wall using the Coach Screws and Nylon Anchors supplied.


2.2 Timber Stud Wall

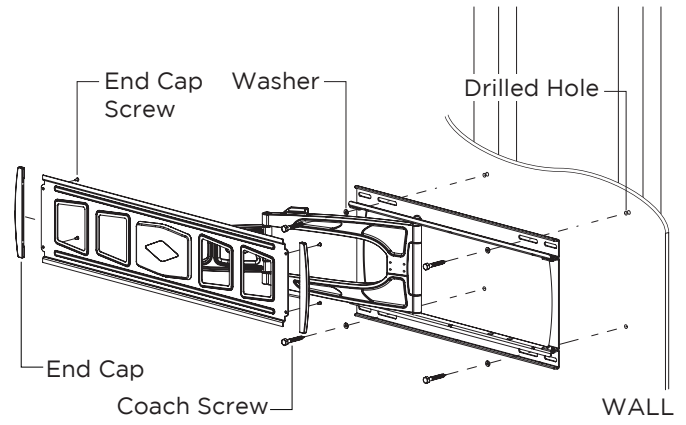

Drill four 5mm (0.2") diameter holes, 58mm (2.3") deep. Secure the mounting plate to the wall using the Coach Screws supplied.


Note: Use a stud finder to accurately locate the centre of the stud. Ensure that all screws fix securely into stud.

3. Attach Top Caps to the installed Arm/Wall Mount

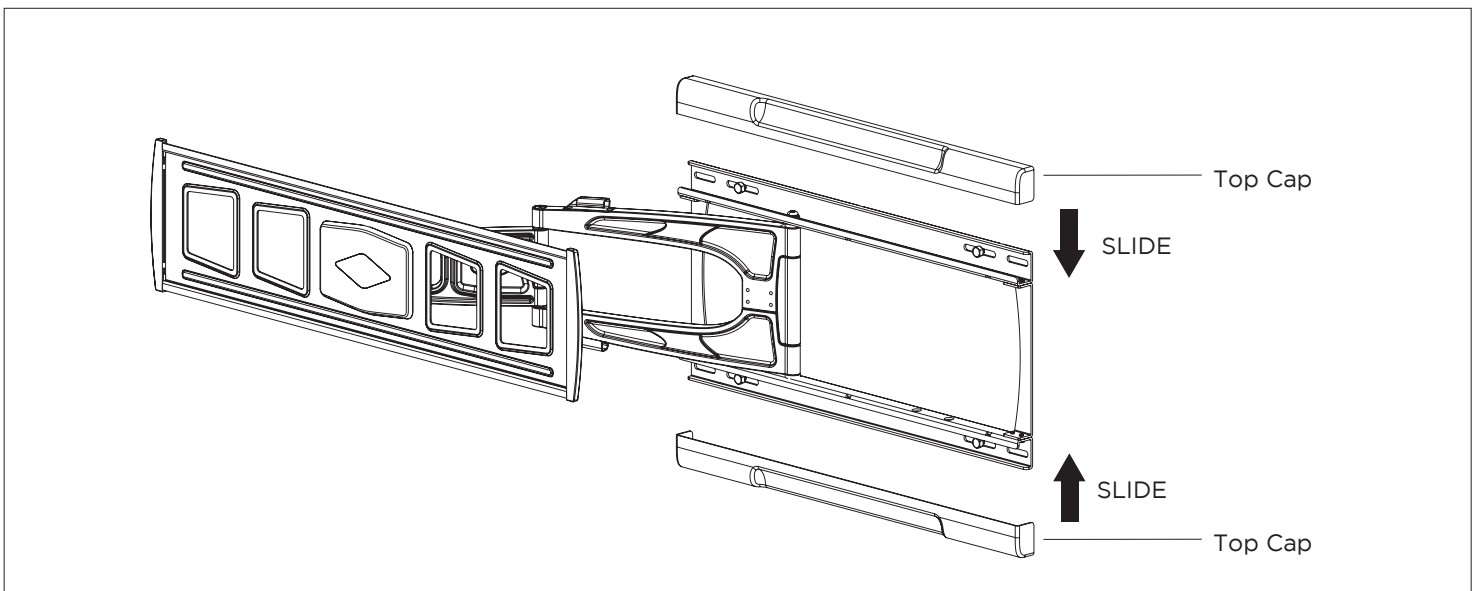


4. Attaching Mounting Brackets to Display


The mounting brackets support hole configurations from 200x100mm to 700x500mm.

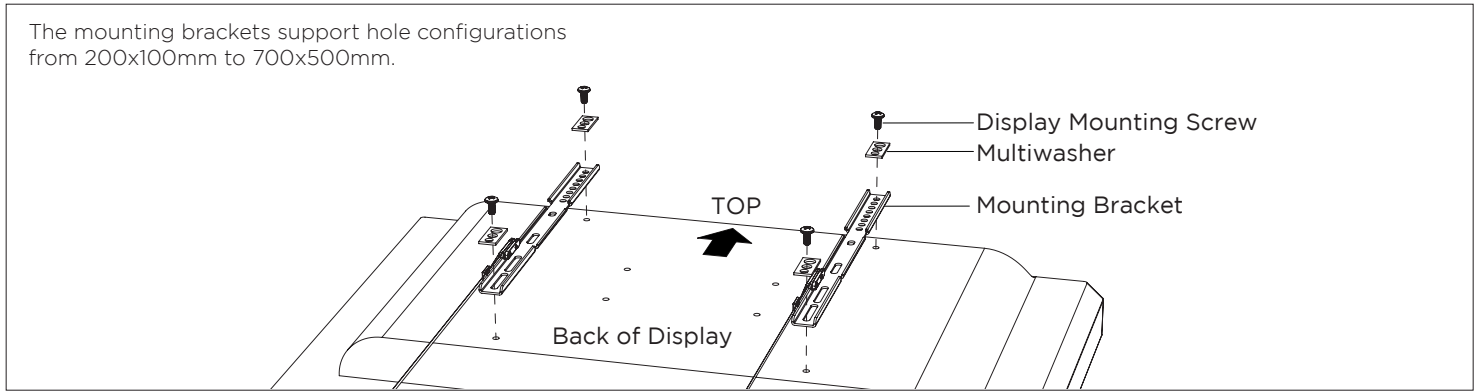


5. Attaching/Detaching Display to the installed Arm (2 people required)

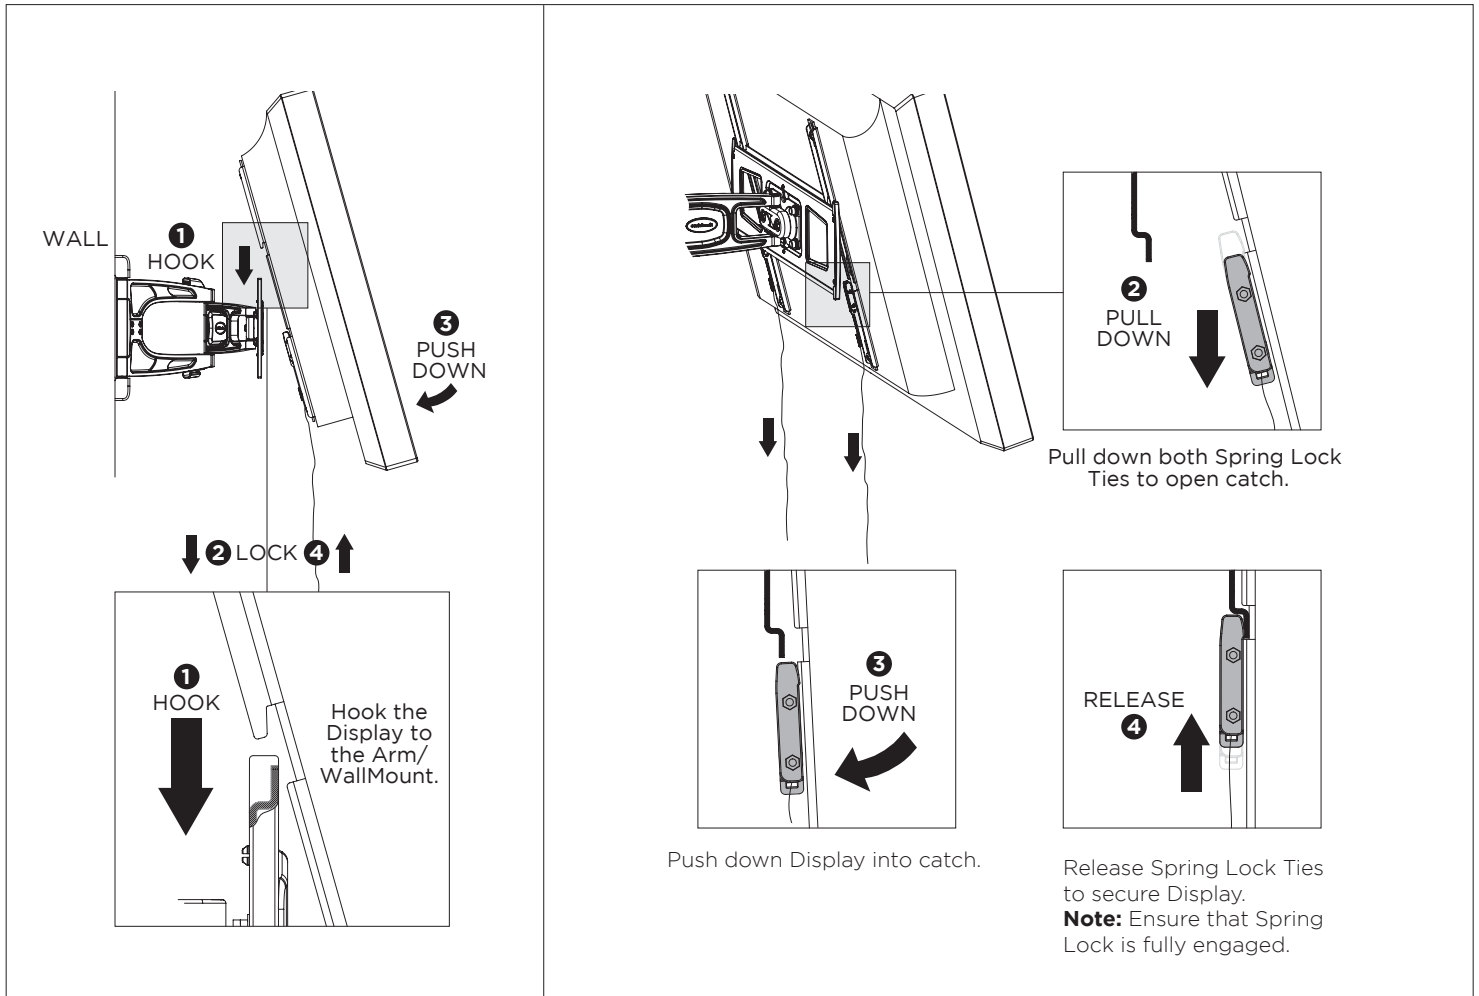


6. Attach Locking Blocks to fully secure the Display

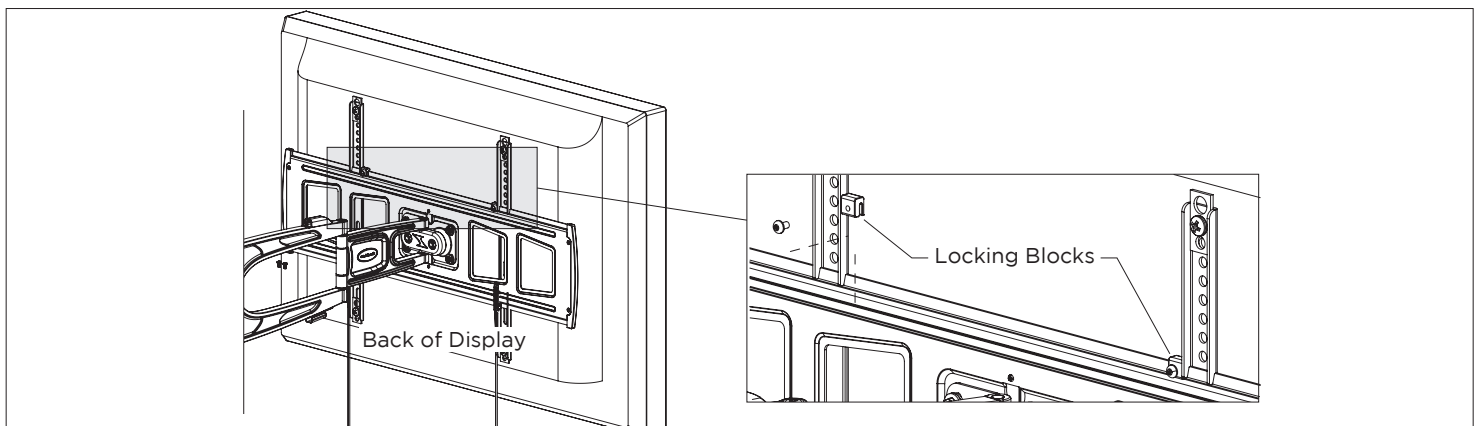

7. Adjust Arm movement if necessary

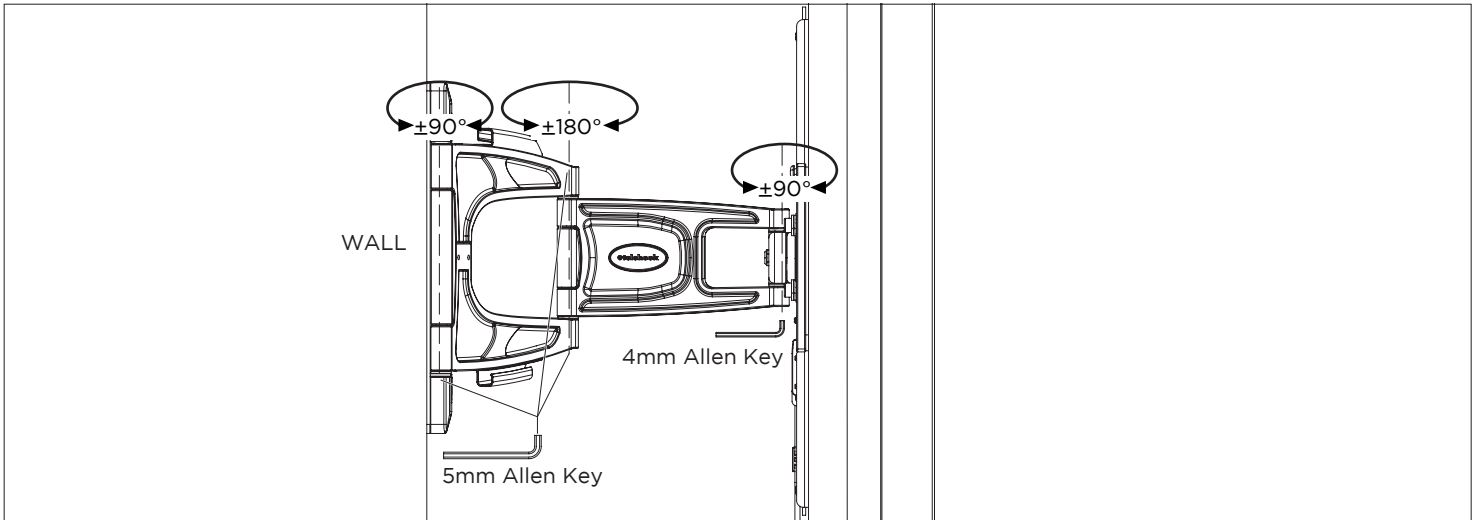

8. Adjust tilt and roll if necessary

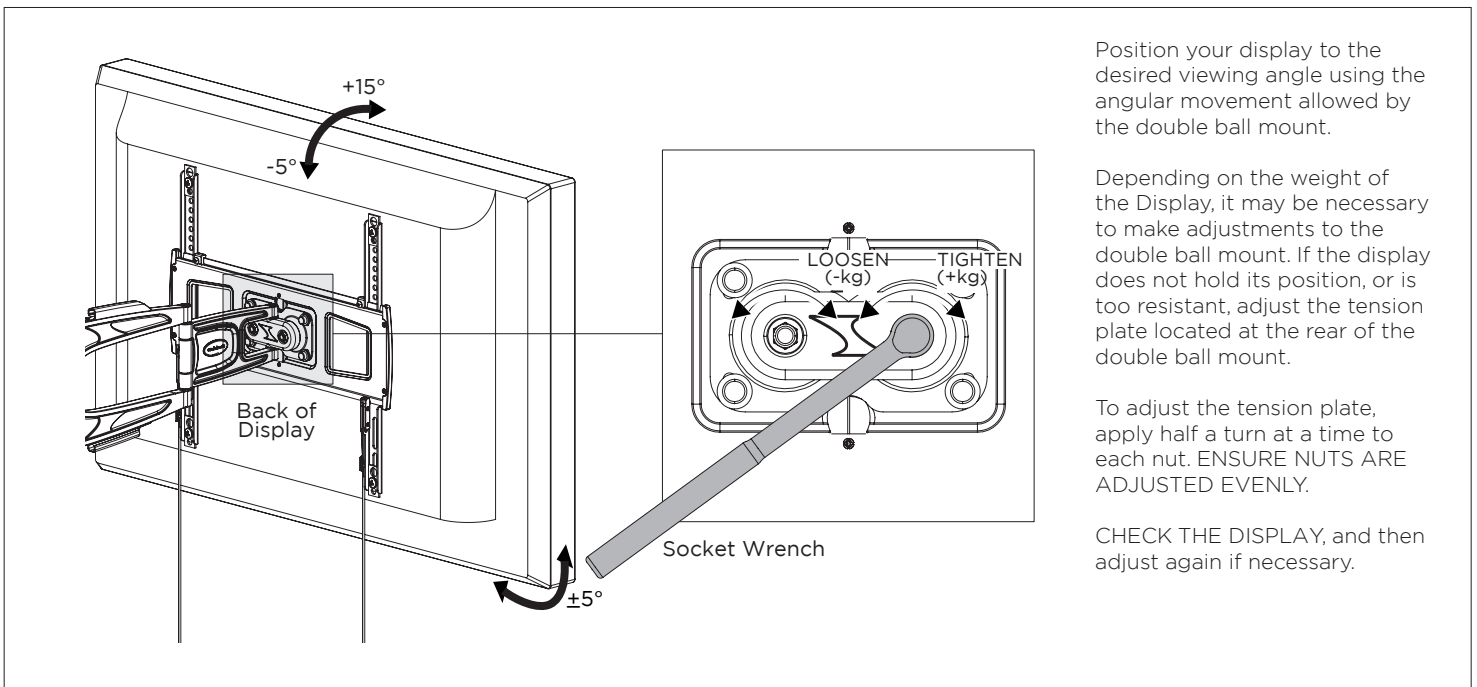

9. Cable Management

